



Asterabox™ CRMX ART7

The Asterabox™ is the interface between lights and controller. We added a CRMX transmitter to the Asterabox™. Just plug it to your DMX console and control your X-series light (AX7 etc) and other lights with CRMX technology.

The ART7 can transmit up to 512 DMX channels with the most stable wireless DMX available. Of course the new Asterabox™ still works as an interface between Asterapp™ and our lights. It's built in battery enables easy and time-saving setup, just like all our products.

Connections



Asterapp™



DMX console

In a box

- Asterabox™
- Micro USB cable
- USB Adapter
- DMX Adapter Cable
- Carrying case
- Quick Start Guide



Accessories (included)



Micro USB cable
Standard



Carrying Case
ART7-CSE



DMX Adapter
ART7-ADP





ART7

AsteraBox™

Battery:	Samsung ICR Cell Battery
Runtime:	72hrs (App usage) 16h (CRMX usage)
Nominal Voltage:	3.7v
Charger Output:	5V DC-2A
Charging Time:	8hrs(from AC or high power USB port)
Wireless Frequency:	865 - 870MHz sender/receiver (EU) 902-928MHz sender/receiver (USA) 2.4GHz wireless module
Range: RF,	300m RF range 500m CRMX range 10m Bluetooth range
Operational Temp:	0°C - 40°C
Inactive Temp:	-20°C - 60°C
Unit Size:	L144mm x W78mm x H30mm L5.7" x W3.0" x H1.2"
Weight:	0.230kg 0.5lb
Housing:	Aluminum
Environment:	Indoor / Dry Outdoor
Humidity:	≤90%
Ports:	Micro-USB for charging 3.5" jack for DMX input

Technical drawing

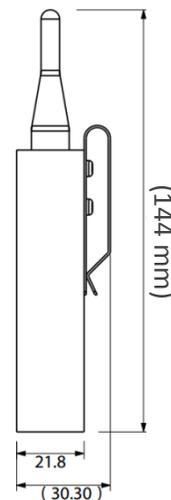

Compatible devices



AX1



AX3



AX7



AX10



Other CRMX fixtures**



AL1*



AL3*



AL6*



AL7*

* no CRMX support
**no App support