



# AX10

# SpotMax™

## Data sheet

### Optical

- Colours  
RGBAW
- Total LED power  
135W
- Luminous Flux  
3350Lm
- Emittance (@2m)  
10350Lx
- CRI  
92
- Strobe  
0-25Hz
- Beam Angle  
13°
- Pixels  
1

### Construction



- Housing  
Aluminium
- IP Rating  
IP65
- Relative humidity  
0-100%
- Operating Temperature  
0-40 °C  
32-104 °F
- Weight  
7.98kg  
17.5Lbs
- Dimensions  
279 x 296 x 253 (mm)  
10.9 x 11.6 x 9.9 (inches)

### Accessories

-  Powercon True1 cord  
AX10-CHR (Included)
-  32° Flood diffusor  
AX10-DDSK (Included)
-  13°x 46° Wallwash diffusor  
AX10-WWDSK (Included)
-  13°x 46° Rotatable diffusor  
AX10-ROTAD
-  Charging case  
AX10-CHRCSE
-  Super bolt  
AX10-BLT

### Electrical

- Battery  
LG Chem Lithium-ion
- Battery Lifetime  
70% after 300 cycles
- LED Lifetime  
50.000 Hours
- Charging time (nominal)  
7 Hours
- Input Voltage  
90-264V 47-63Hz
- Input Current  
2A/115VAC ~ 1.0A/230VAC
- Inrush Current  
Cold start 70A/230VAC

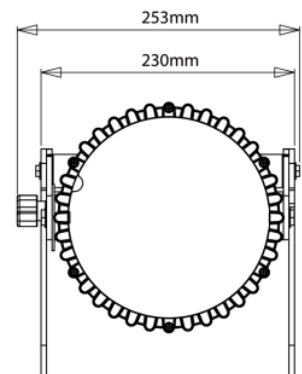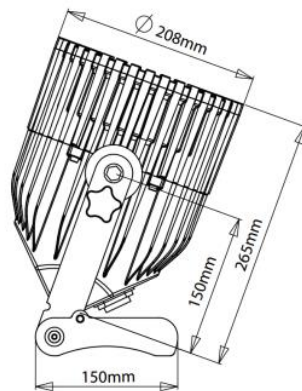

### Control

- Wireless Modules  
865-870MHz  
902-928MHz  
2.4GHz
- Range  
300m | 330 Yards
- DMX  
Supports CRMX and W-DMX

