



# Datasheet

# NET BOX



Prep up to 4x QuikBeams while charging their QuikBrick batteries in the case or even 100m / 328 ft. away with the Astera NetBox. IP65-rated and specifically designed to support Ethernet-based workflows and professional rigging conditions, NetBox allows for any software adjustment or App pairing in 10 seconds.


## SPECIFICATIONS

Order Code	AST-NETBX
Battery Runtime	12 h
Battery Lifetime	80 % after 400 cycles
Charging Time (nominal)	3 h 30 min
AC Input	100 - 240 VAC, 50/60 Hertz, 115 VAC - 5.2 A / 230 VAC - 2.9 A
DC Connector	PowerCON TRUE1 IN / OUT
DC Output	4 x 55 VDC - 1.67 A
Data Input / Output	Ethernet
Fixture Output	4 x EtherCON PoE++
Data Sockets	EtherCON IN / OUT
Ethernet Port Speed	100 Mbit/s
Fail-safe Ethernet Relay	Yes
Ethernet Port Speed	100 Mbit/s
IP Rating wired / unwired	IP65
Ambient Operating Temperature	0 - 40 °C / 32 - 104 °F
Weight	2.4 kg / 5.29 lbs
Dimensions (L x W x D)	226 mm x 145 mm x 55.5 mm / 8.90" x 5.75" x 2.19"
Mounting Options	3/8" - 16 UNC, Ø 12.5 mm hole

All specifications provided are typical values and maybe subject to change without prior notice.


## DRAWINGS

### Bottom view

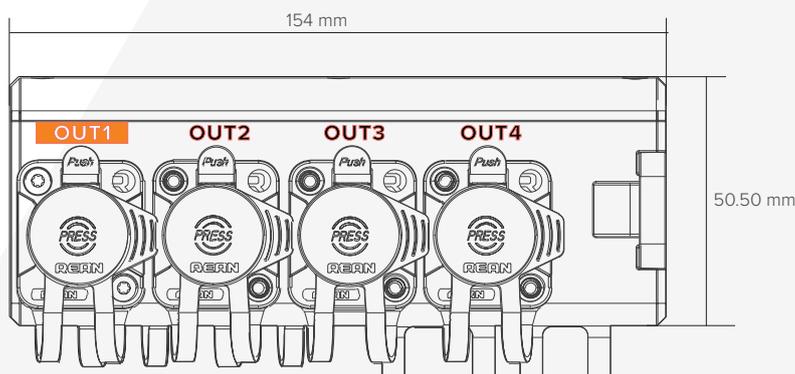


# DRAWINGS


Front view

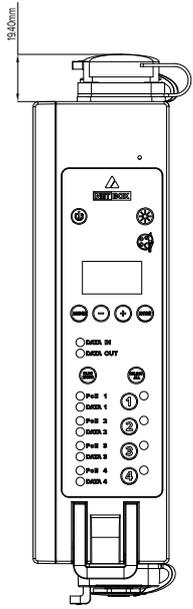


Back view

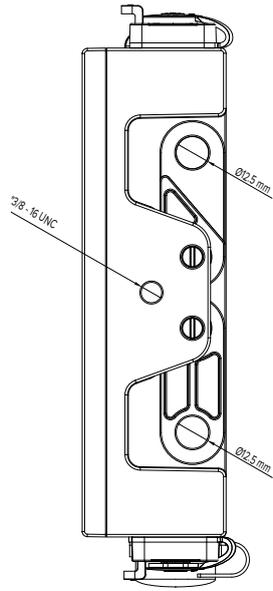


Side view

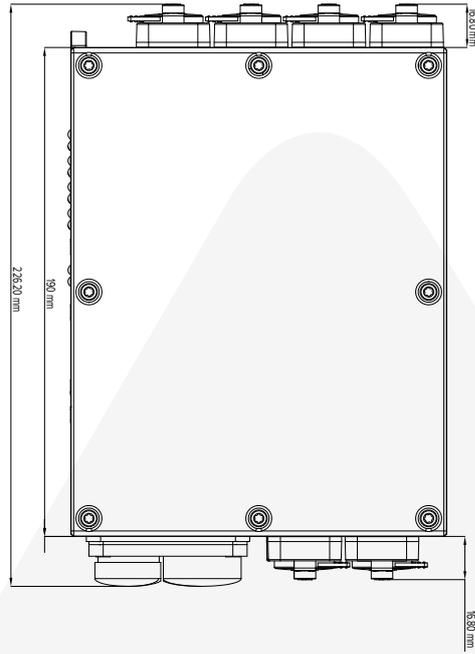

Isometric view

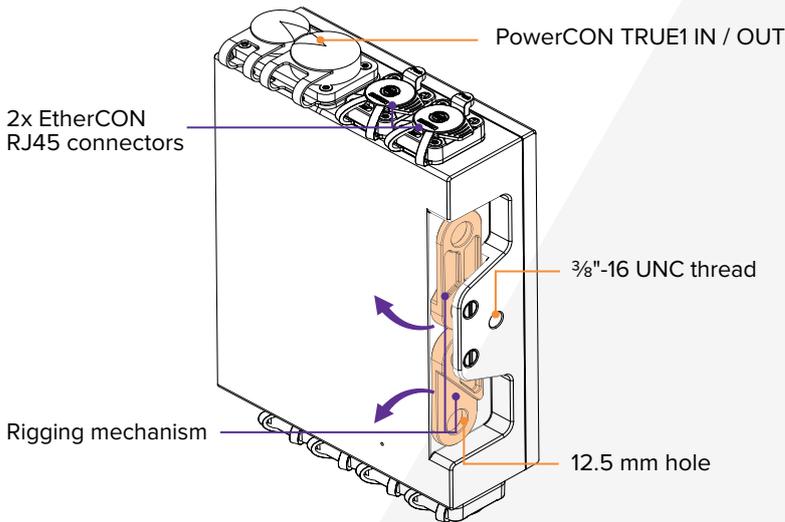

# CONNECTION DIAGRAM

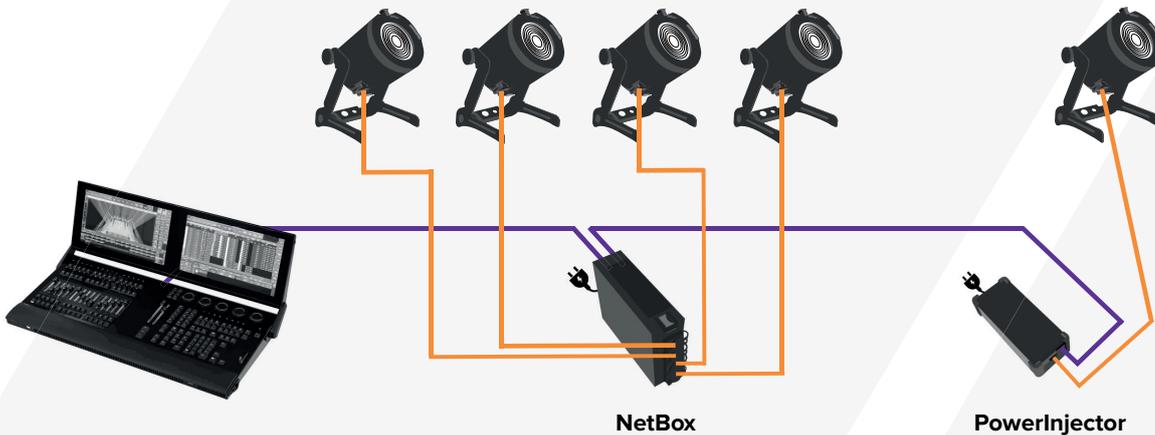

- Purple cables ArtNet / sACN
- Orange cables PoE++ ArtNet / sACN