



Datasheet

CHARGING DOCK

for 4 QuikBricks



Fast-charge up to four batteries at once with the dedicated QuikBrick Charging Dock. Simply connect to power, place the batteries in the dock, and let them charge.



In addition to the charging dock, QuikBricks can also be charged via USB-C or PoE when placed inside QuikBeam. Multiple options for a versatile workflow.

SPECIFICATIONS

Order Code	AST-QUKBM-CHRDK-QBK
AC Input	100 - 240 VAC, 50/60 Hertz, 115 VAC - 2 A / 230 VAC - 1 A
AC Connector	PowerCON TRUE1 IN
DC Output	4 x 12 VDC - 1.5 A
Charging Connectors	4 x 6-pin connector
Ambient Operating Temperature	0 - 40 °C / 32 - 104 °F
Weight	610 g / 1.34 lbs
Dimensions (L x W x D)	226.4 mm x 77.4 mm x 65.5 mm / 8.9" x 3" x 2.6"

All specifications provided are typical values and maybe subject to change without prior notice.

DRAWINGS

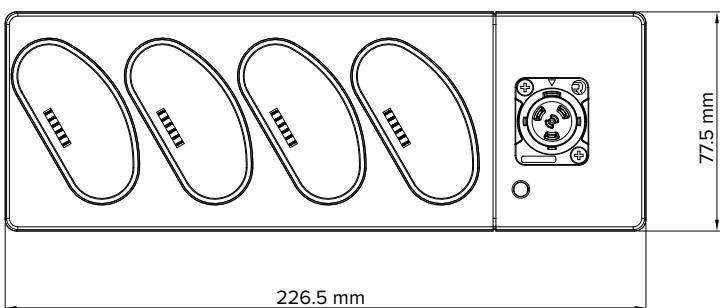

How to insert a QuikBrick in ChargingDock

