



The Tracklight Adapter converts QuikBeam to QuikBeam Connect with an integrated power supply and no visible cables. Available in black, white, and custom color.

SPECIFICATIONS

	For 3-Circuit Track	For H-Type Track
Order Code (Black Edition)	AST-QUKBM-TKLEUT	AST-QUKBM-TKLHLT
Order Code (White Edition)	AST-QUKBM-TKLEUT-WT	AST-QUKBM-TKLHLT-WT
Order Code (Custom Color)	AST-QUKBM-TKLEUT-CC	AST-QUKBM-TKLHLT-CC
AC Input	100 - 240 VAC, 50 / 60 Hz, PF>0.9, 0.5 A / 115 VAC, 0.3 A / 230 VAC, 30.5 W	
DC Output	12 VDC - 2 A, 24 W	
DC Connector	1 x 6 Pin connector	
Track System	3-Circuit Track	H-Type Track
IP Rating	IP20	
Ambient Operating Temperature	0 - 40 °C / 32 - 104 °F	
Weight	1 kg / 2.2 lbs	0.98 kg / 2.15 lbs
Dimensions (H x W x Ø)	271 mm x 198 mm x Ø 153 mm / 10.65" x 7.79" x Ø 6"	254 mm x 200 mm x Ø 153 mm / 10" x 7.88" x Ø 6"
Pan Range	350°	
Tilt Range	170°	

All specifications provided are typical values and maybe subject to change without prior notice.




DRAWINGS

For 3-circuit track systems

Back side


Zoom out

Zoom in

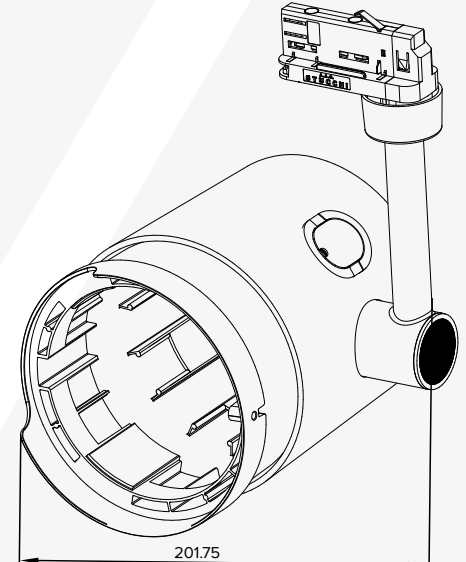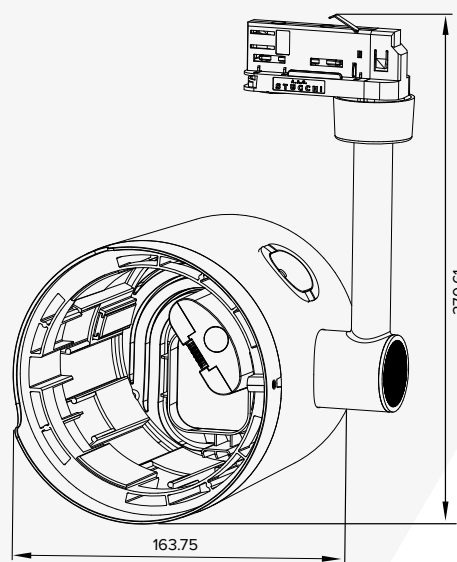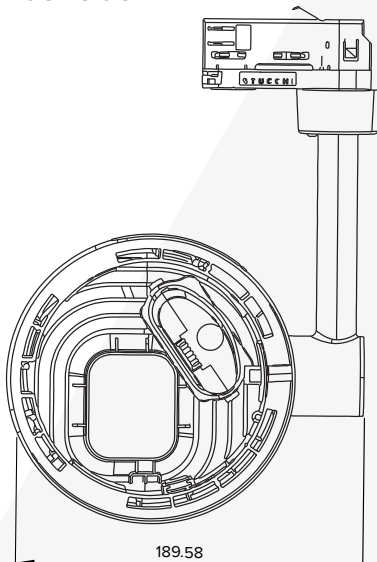


For H-type track systems


Back side

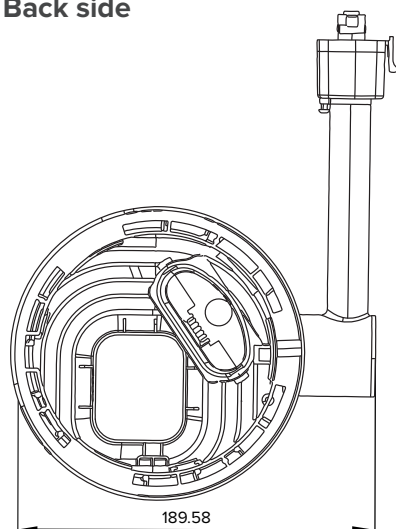


Zoom out

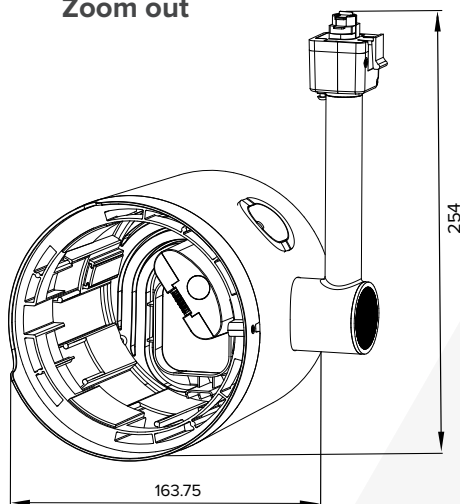

Zoom in

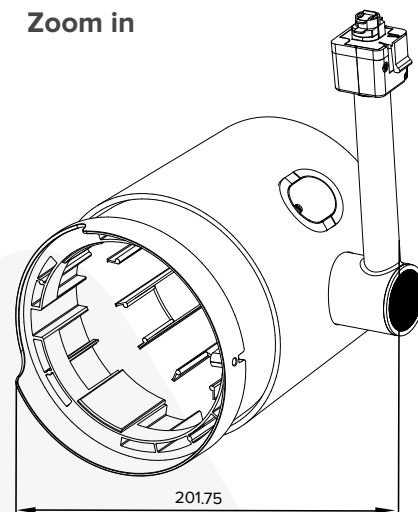




FRONT SIDE

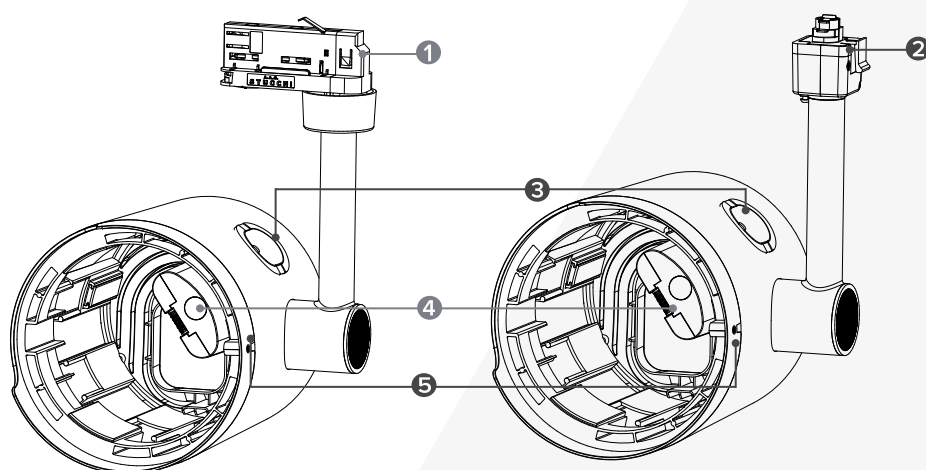

- ❶ 3-Circuit Track adapter
- ❷ H-Type Track adapter
- ❸ SafetyLink cutout
- ❹ PSU
- ❺ Zoom lock


QUIK TURN

Rotate barrel counter-clockwise to zoom in. Zoom range: 13° to 60°

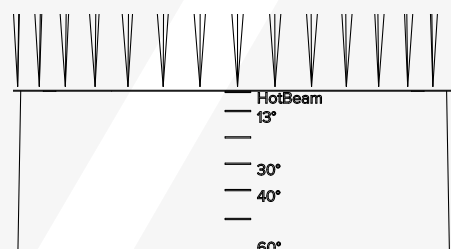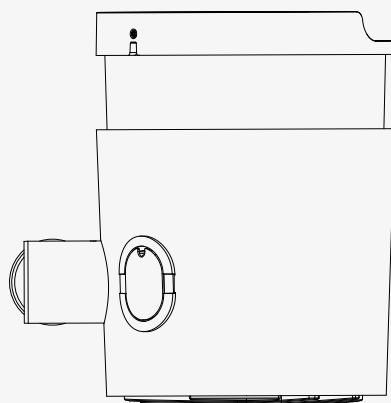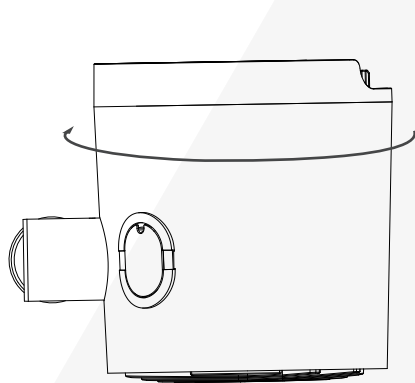

QUIKBEAM CONNECT MOUNTED ON

3-Circuit Track

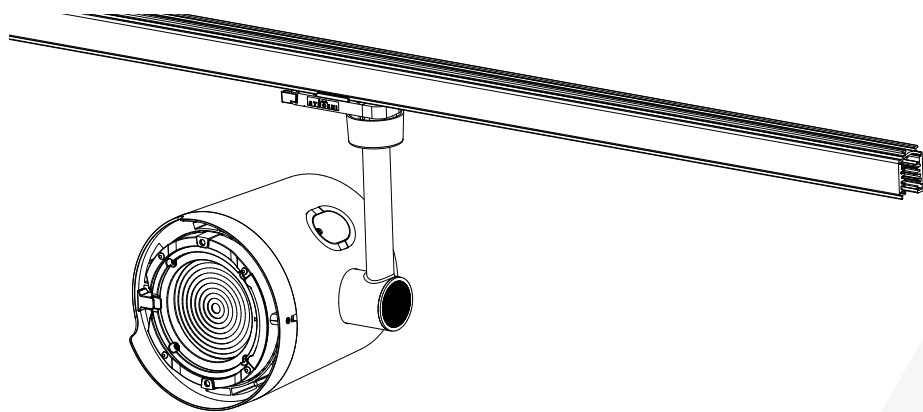

H-Type Track

