




Datasheet

DATA | LINK



Required device to send wired DMX to Hyperion Tube. Also useful for Titan Tube and Helios Tube if no Titan PowerBox is available or to work with multiple universes on one PowerBox**

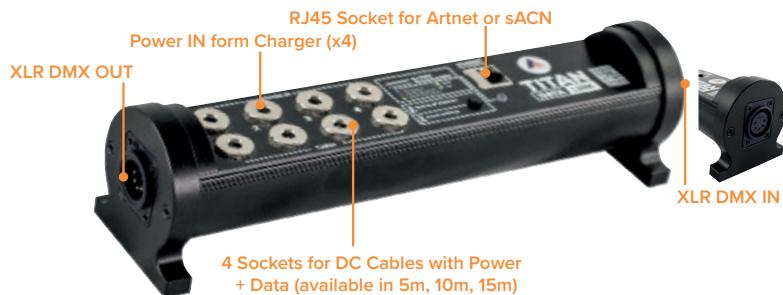

SPECIFICATIONS

Order Code	FP1-DTL
DC Input	4 x 24 VDC, max. 4 A
DC Connector	4 x DC Barrel (5.5 mm / 2.1 mm)
DC Output	4 x 24 VDC
Data Input	XLR-DMX, ART-Net (1 Universe), sACN (1 Universe)
Data Output	DMX via 4 x DC sockets, DMX via 5-pin XLR
Data Sockets	5-pin XLR IN/OUT, RJ45 input
IP Rating	IP20
Ambient Operating Temperature	0 - 40 °C / 32 - 104 °F
Dimensions (L x W x D)	267 mm x 69 mm x 64 mm / 10.5" x 2.7" x 2.5"
Mounting Options	4 x M5 threads / 2 x 1/4" - 20 UNC

All specifications provided are typical values and maybe subject to change without prior notice.


USE CASES

Power/Data connection with PSU. DMX connector. Up to 4 tubes can be connected with 4 power supplies.




**Suitable for Helios Tube, Titan Tube and Hyperion Tube

MULTIPLE DMX UNIVERSES TO ONE POWERBOX

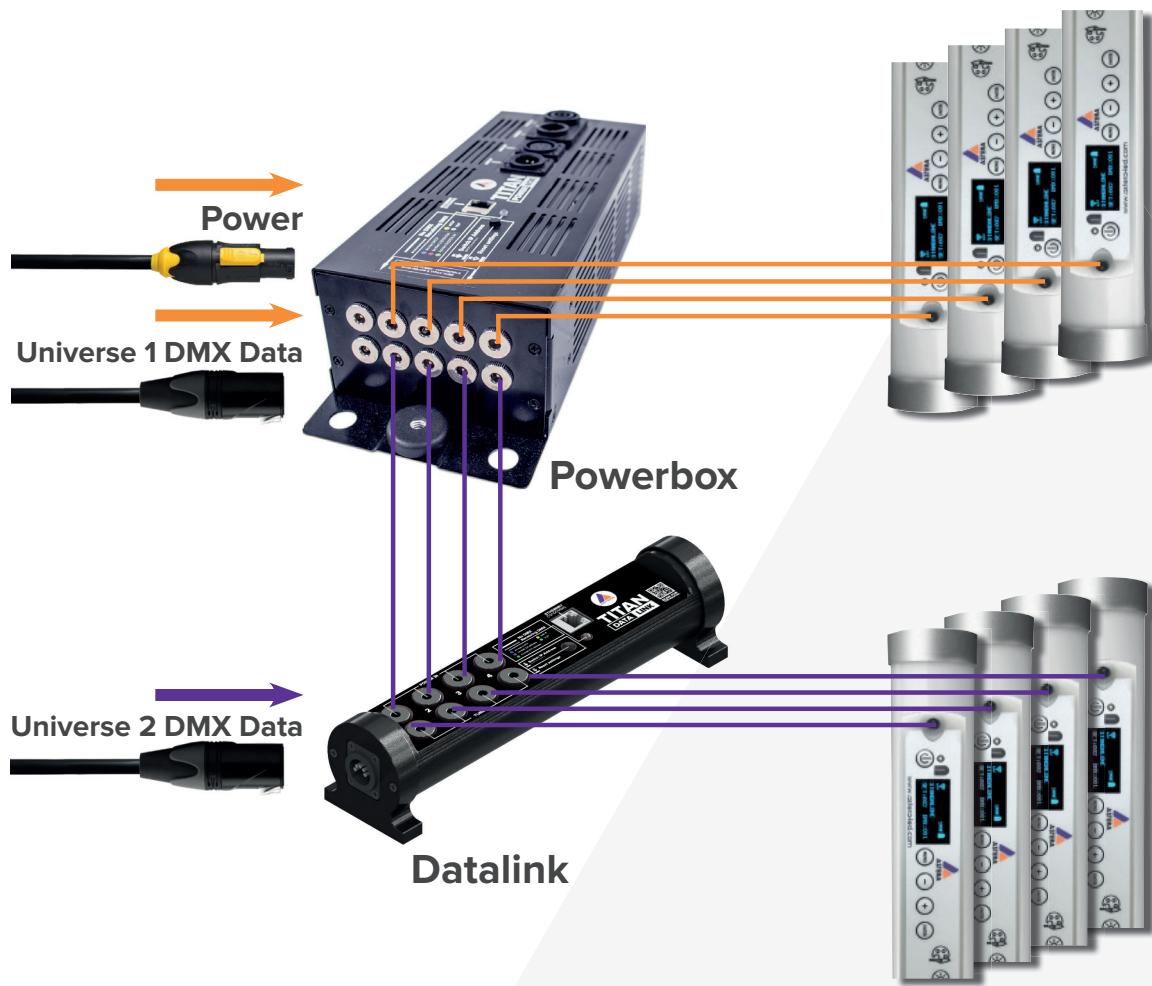

DRAWINGS

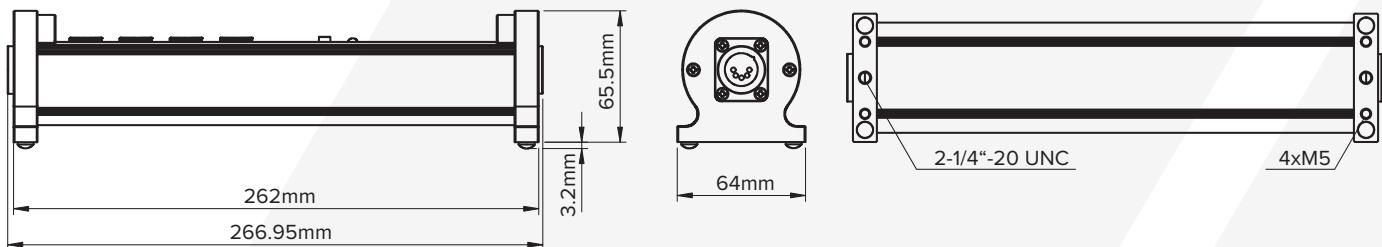

**Suitable for Helios Tube, Titan Tube and Hyperion Tube