



# AX10 SpotMax™

## Data sheet

### Optical

Colours  
RGBAW

Total LED power  
135W

Luminous Flux  
3350Lm

Emittance (@2m)  
10350Lx

CRI  
92

Strobe  
0-25Hz

Beam Angle  
13°

Pixels  
1

### Construction

Housing  
Aluminium

IP Rating  
IP65

Relative humidity  
0-100%

Operating Temperature  
0-40 °C  
32-104 °F

Weight  
7.98kg  
17.5Lbs

Dimensions  
279 x 296 x 253 (mm)  
10.9 x 11.6 x 9.9 (inches)

Environment  
Indoor | Outdoor

### Accessories

-  Powercon True1 cord  
AX10-CHR (Included)
-  32° Flood diffusor  
AX10-DDSK (Included)
-  13°x 46° Wallwash diffusor  
AX10-WWDSK (Included)
-  13°x 46° Rotatable diffusor  
AX10-ROTAD
-  Charging case  
AX10-CHRCSE
-  Super bolt  
AX10-BLT

### Electrical

Battery  
Samsung Lithium-ion

Battery Lifetime  
70% after 300 cycles



LED Lifetime  
50.000 Hours

Charging time (nominal)  
7 Hours

Input Voltage  
90-264V 47-63Hz

Input Current  
1.8A/115VAC ~ 1.0A/230VAC

Inrush Current  
Cold start 70A/230VAC

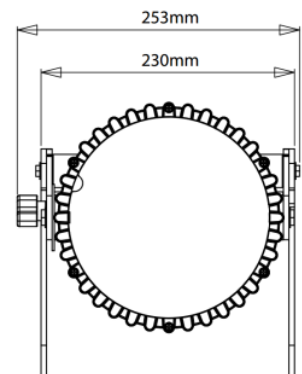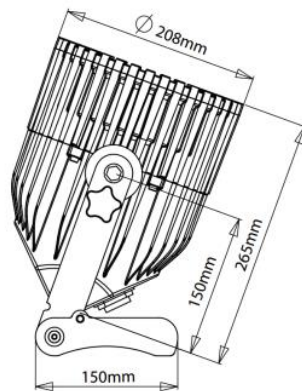

### Control

Wireless Modules  
865-870MHz  
902-928MHz  
2.4GHz

Range  
300m | 330 Yards

DMX  
Supports CRMX and W-DMX

