



# DATASHEET

# Charging Case for AX2

Compatible with:  
AX2-50 or AX2-100



Sturdy flight case to transport 4 AX2-50 or 4 AX2-100. With the recommended DistributionCable you can charge up to four AX2 via PowerCON TRUE1 cable. Dedicated spaces for barndoors, feet and additional side compartment for other accessories.



## SPECIFICATIONS

Order Code	AX2-50-CHRCSE	AX2-100-CHRCSE
Dimensions (L x W x H)	806 mm x 606 mm x 413 mm / 31.7" x 23.9" x 16.3"	1206 mm x 606 mm x 413 mm / 47.5" x 23.9" x 16.3"
Weight (empty)	33.25 kg / 73.30 lbs	43.60 kg / 96.12 lbs
Material	Plywood, Aluminium	Plywood, Aluminium

## RECOMMENDED ACCESSORY

Charge up to four AX2-50/  
AX2-100 via PowerCON TRUE1  
cable.



1x DistributionCable (not included)  
(AX2-CHRCSE-ACDIS)

## CAN HOLD









Dedicated space for Barndoors



	AX2-50-CHRCSE	AX2-100-CHRCSE
	4x PixelBar 50 (not included) (AX2-50)	4x PixelBar 100 (not included) (AX2-100)
	8x TrackPin (not included) (AX-TP)	8x TrackPin (not included) (AX-TP)
	8x Barndoor (not included) (AX2-50-BD)	8x Barndoor (not included) (AX2-100-BD)
	8x Feet (not included) (AX2-FT)	8x Feet (not included) (AX2-FT)
	4x PowerCON TRUE1 (not included)	4x PowerCON TRUE1 (not included)
	4x FlyBar (not included) (AX2-FB)	4x FlyBar (not included) (AX2-FB)
	4x JumpCable (not included) (AX2-JC)	4x JumpCable (not included) (AX2-JC)




# CAN HOLD

The Flightcase can hold a total of 8 diffusers and/or stealth covers in any combination.

AX2-50-CHRCSE	AX2-100-CHRCSE
 8x 30° Filter (not included) (AX2-50-F30)	 8x 30° Filter (not included) (AX2-100-F30)
 8x 60° Filter (not included) (AX2-50-F60)	 8x 60° Filter (not included) (AX2-100-F60)
 8x 120° Filter (not included) (AX2-50-F120)	 8x 120° Filter (not included) (AX2-100-F120)
 8x StealthCover (not included) (AX2-50-SC)	 8x StealthCover (not included) (AX2-100-SC)

# DRAWINGS

## AX2-50-CHRCSE

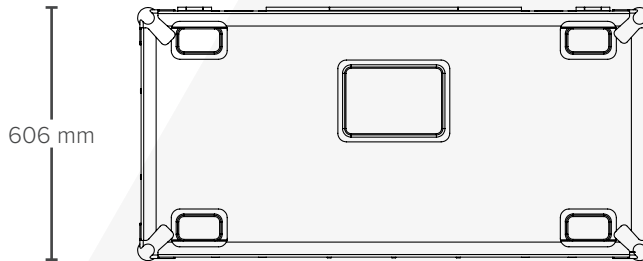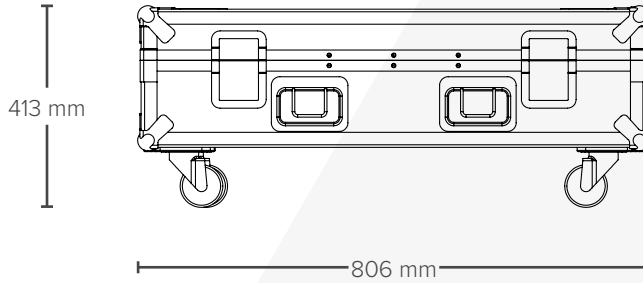

## AX2-100-CHRCSE

