



Datasheet

Charging Case for AX2



AX2-50

AX2-100

This sturdy flight case can charge 8 AX2-50 or 4 AX2-100 through the integrated charging box from one AC socket. Dedicated spaces for barndoors, brackets and additional side compartment for other accessories. Please note that the exact outlook of the case differs outside of Europe.

SPECIFICATIONS

Order Code	AX2-50-CHRCSE	AX2-100-CHRCSE
Weight (empty)	33.25 kg / 73.30 lbs	43.60 kg / 96.12 lbs
Dimensions (L x W x D)	806 mm x 606 mm x 413 mm / 31.7" x 23.9" x 16.3"	1206 mm x 606 mm x 413 mm / 47.5" x 23.9" x 16.3"


All specifications provided are typical values and maybe subject to change without prior notice.

CONTENT

AX50
8x PixelBar 50 (AX2-50 / not included)
1x ChargingHarness (AX2-50-CHRCSE-CHH / included)
16x TrackPin (AX-TP / not included)
16x Barndoors (AX2-50-BD / not included)
16x Brackets (not included)
8x PowerCon True1 cable (included)
8x FlyBar (AX-TP / not included)
8x JumpCable (AX-JC / not included)


AX100
4x PixelBar 100 (AX2-100 / not included)
1x ChargingHarness (AX2-100-CHRCSE-CHH / included)
8x TrackPin (AX-TP / not included)
8x Barndoors (AX2-100-BD / not included)
8x Brackets (not included)
4x PowerCon True1 cable (included)
4x FlyBar (AX-TP / not included)
4x JumpCable (AX-JC / not included)

Dedicated space for Barndoors

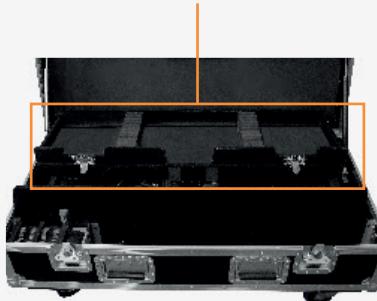


DRAWINGS


AX2-50



SECTION A

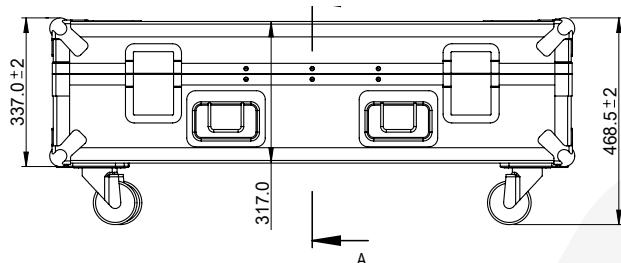

AX2-100



Section A

